

X-Out Melamine Floor Pads




Open Cell Polymeric Foam

Pro-Link's X-Out Melamine floor pads effectively clean floors producing outstanding results. They are excellent for cleaning shallow grouted floors, periodic deep cleaning, and the removal of stubborn black marks.

X-Out Melamine pads are designed for use on VCT, terrazzo, tile (ceramic and porcelain), concrete and epoxy floors. They are manufactured with two materials laminated together with a water based adhesive; 100% open cell melamine white foam for cleaning the floors and a brown non-woven backing made of 100% recycled PET polyester fiber. This innovative floor pad:

- Removes black marks from floors
- Restores tile and grout to a "like new" appearance
- Reduces overall cleaning costs

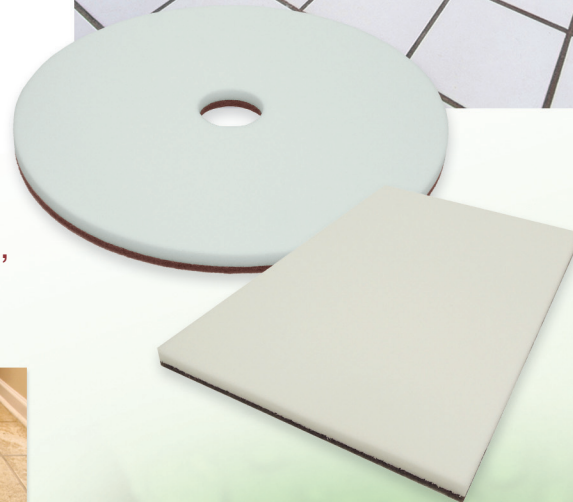

Enjoy the superior cleaning characteristics of melamine, keeping your facility's floors fresh, clean and looking new.



Environmental Features


- Cleans with water – no chemicals needed
- Brown backing is made with 100% recycled post-consumer polyester fibers (for example – PET from soda or water bottles)
- Uses a water-based adhesive to laminate backing with the foam



View the X-Out Melamine floor pad demo to see the dramatic results

X-Out Melamine Floor Pads

Open Cell Polymeric Foam

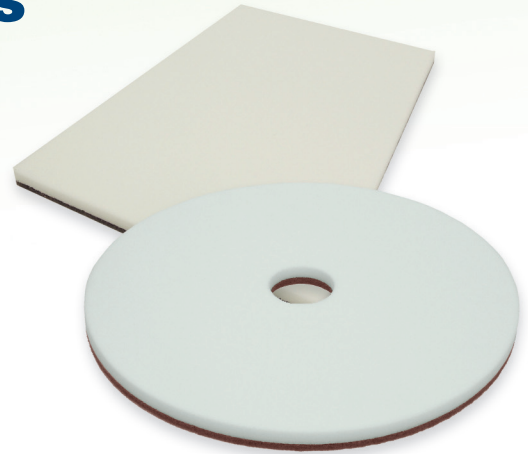

Order Information			
Item #	Description	Size	Case Pack
FX13	Floor Pad	13"	5
FX14	Floor Pad	14"	5
FX17	Floor Pad	17"	5
FX20	Floor Pad	20"	5
FX1218	Floor Pad for Orbital Scrubbers	12" x 18"	5
FX1420	Floor Pad for Orbital Scrubbers	14" x 20"	5
FX1428	Floor Pad for Orbital Scrubbers	14" x 28"	5
FX1432	Floor Pad for Orbital Scrubbers	14" x 32"	5
FUP20	Utility Pad	4.5" x 10"	4 Bags of 5 (20)

Other sizes available by request

Technical Tips

1. Apply non woven pad to floor cleaning machine, white melamine side facing down toward floor.
2. The incredible cleaning properties of melamine foam create an unusually high level of friction when introduced to the floor. It is important to add water, a neutral cleaning solution, or a degreaser to both the floor pad and to the floor in order to reduce friction upon startup. The pads and floor should remain completely saturated while in use.
3. Ensure the pad is correctly centered on the cleaning machine.
4. Be sure to check machine pressure to avoid premature wear of pad.
5. Best suited for standard speed machines: both single disc, oscillating and automatic scrubber.

Properties

Thickness:	0.9" Total – Melamine 0.6" – Nonwoven 0.3"
Weight:	40 ounces/square yard
Lamination:	Water-based System Adhesive

Pad Coverage Rates

Floor Type	Pad Coverage*
Ceramic & Porcelain Tile	1,000 Sq. Ft.
VCT	5,000 Sq. Ft.
Terrazzo	5,000 Sq. Ft.
Epoxy & Concrete	Up to 5,000+ Sq. Ft.

* Smooth surfaces. On uneven, rough, abrasive, and coarse floors, coverage may be considerably less.

Distributed by: _____



The USGBC Member Logo is a trademark owned by the U.S. Green Building Council and is used by permission. Pro-Link® is a registered trademark of Pro-Link, Inc.

Copyright © 2012, Pro-Link, Inc. All rights reserved.